

INSTRUCTION MANUAL EN

Please read this manual carefully before using the Cambo CS rig!

Thank you for purchasing a Cambo product

The Cambo CS system complies with the "Arriflex® 15mm Light Weight" standard. This means the CS system is compatible with parts of other brands using the 15mm light weight standard. The 15mm light weight standard characteristics are: 15mm iris rods that are positioned 60mm apart and 85mm below the optical axis.

The Bronto-rig offers stability during handheld video capturing from low-angle. This Bronto rig can be extended to any rig configuration.

The rig includes a 1/4 Ballhead for Monitor attachment to the front of the handle.


The Bronto-rig can be used with any follow-focus and/or matte box, this rig configuration allows to center the weight of the camera by the position of the handle for optimised alignment of the shooting direction.

A Bundle with Cambo Mattebox and Follow Focus is also available.



The distance between the optical centre of the lens and the iris rods is adjustable, making this rig applicable to different types of cameras.

Warnings

- ✘ Before loosening a clamp knob, ensure that the loosened part of the rig is supported.
- ✘ Do not tighten the clamp without a rod inserted. This can deform and damage the clamp.

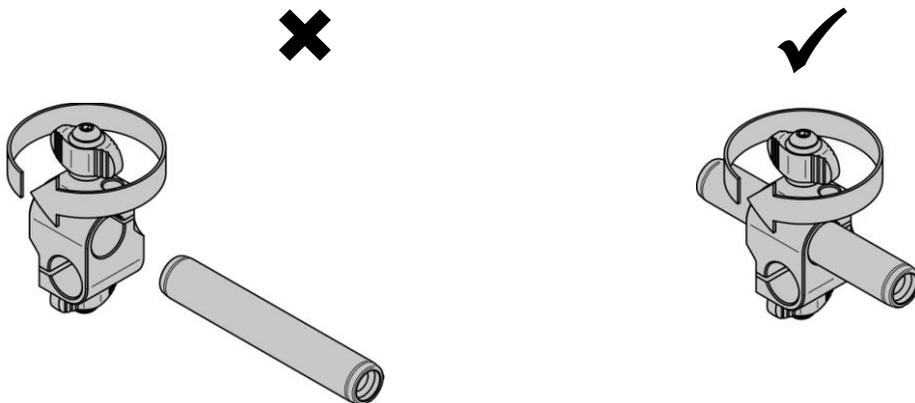

- ✘ Always check, after (re)assembly of the rig, if the clamps connecting the rods or handles are well tightened.

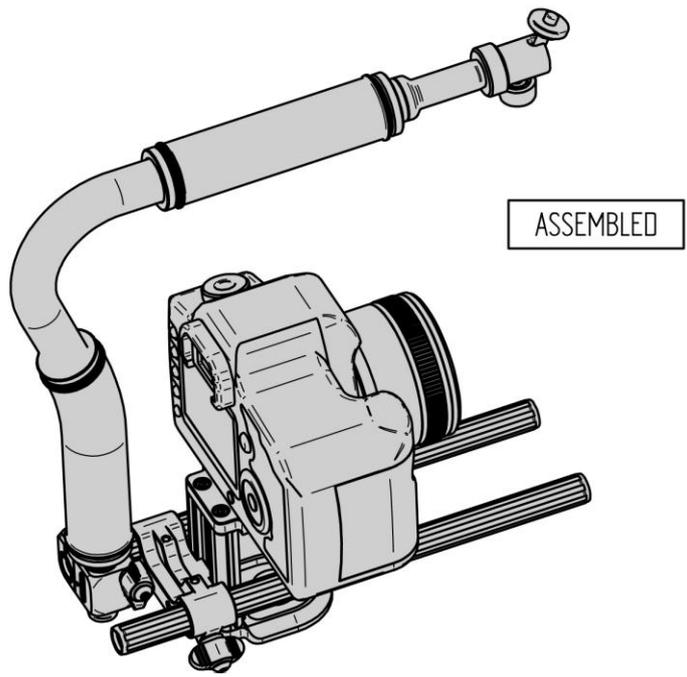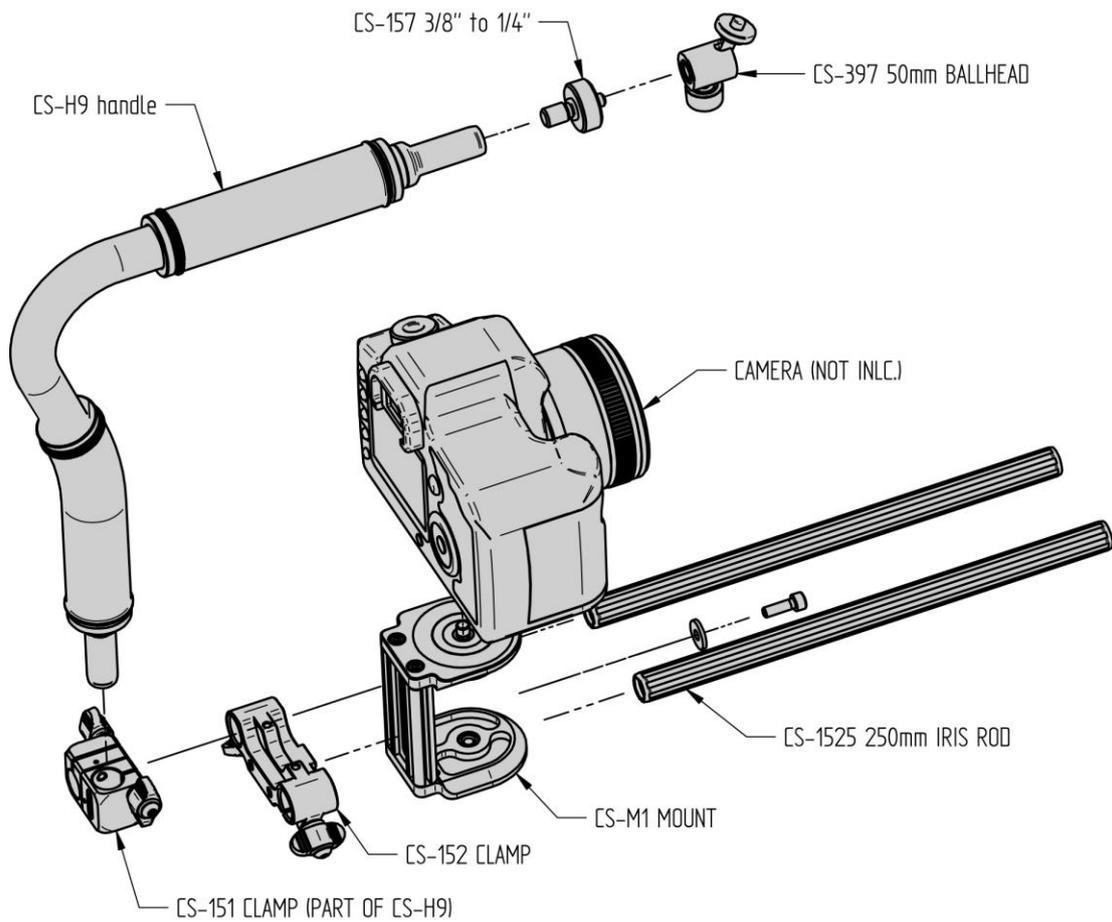

BEFORE USE CHECK IF THE CLAMPS ARE TIGHTENED

Cambo Photographic Industry B.V. / Cambo Video and Broadcast Products B.V. Cambo R&D 12 October 2011

This instruction manual is prepared with care, although no responsibility, financial or otherwise, is accepted for any consequences related the information stated in this instruction manual. All specifications in this instruction manual are subject to change without notice.

For more information please visit the Cambo web site: www.cambo.com