

MOUNTING INSTRUCTION FOR ULMZD MAMIYA ZD KIT

For horizontal (landscape mode) use of the camera you will need to mount the SLR base part first, on the rear standard of the Ultima 35.

For vertical (portrait mode) use of the camera, the L-Bracket can be mounted to the base part before attaching the Mamiya body to the L-bracket.



Step 1:


Mount the part **A** into the dovetail mount on the rear standard of the Ultima. Fix it with the allen key with the 3 hexscrews inside the 3 holes, but do not over-tighten. Line it up with the ends of the dovetail. Ignore the lettering.

Step 2:

After this, the Mamiya ZD can be mounted on top of the Ultima standard which has part **A** in place, using the thumbscrew. It can be secured by tightening the thumbscrew with help of a pin into the holes.

Do not overtighten !!

To take the Mamiya off, first release the thumbscrew in part **A** and then remove the camera.

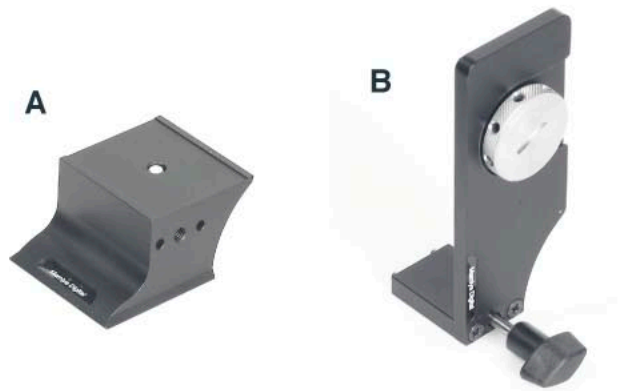

Using the L-Bracket for vertical mounting:

Step 1:

Mount the L-Bracket **B** onto the mount of part **A** in such way that the L rises up on the right side seen from the rear of the camera. Locate the 2 pins into the 2 holes on the side of block **A**. Tighten the knob firmly for optimised stability.



Step 2:

Mount the Mamiya with the thumbscrew in the L-Bracket **B** so that it aligns in place. After this, raise the front standard by 10mm. It will now be exactly in the optical axis. The camera can be secured by tightening the thumbscrew with help of a pin into the holes. Do not overtighten !!

To take the Mamiya off, first release the thumbscrew in part **B** and then remove the camera.

